

SLAB DESIG- NATION	Number of #4 Reinforcement Bars							
	A	B	C	D	E	F	G	H
	5'-1"	5'-7"	6'-1"	3'-4"	2'-11"	2'-4"	1'-10"	1'-2"
S1-24	12					3		12
S1-30	11						11	4
S1-36	8					8	2	
S1-42	9					4		
S1-48	4				4	4		
S2-24	7	6			3			12
S2-30	6	6				3	8	4
S2-36	5	4				10		
S2-42	6	4				4		
S2-48	3	2			4	4		
S3-24	8		6	3				12
S3-30	7		6		3		8	4
S3-36	6		4		2	8		
S3-42	7		4			4		
S3-48	4		2		4	4		

NOTES


Slab designations S1-24 to S1-48 are 5'-5"x5'-5"x8"
 Slab designations S2-24 to S2-48 are 5'-11"x 5'-5"x 8"
 Slab designations S3-24 to S3-48 are 6'-5" x 5'-5"x8"
 The latter number in the slab designation indicates the diameter of the opening in inches.

Half plans shown are for S1 slabs, S2 & S3 slabs are similar, bar designations and number of bars are shown in schedule above.

Bars marked A* in slab S1 change to B bars in slab S2 and to C bars in slab S3.

Bars marked F* in slab S1 change to E bars in slab S2 and to D bars in slab S3.

Bars marked G* in slab S1 change to F bars in slab S2 and to E bars in slab S3.

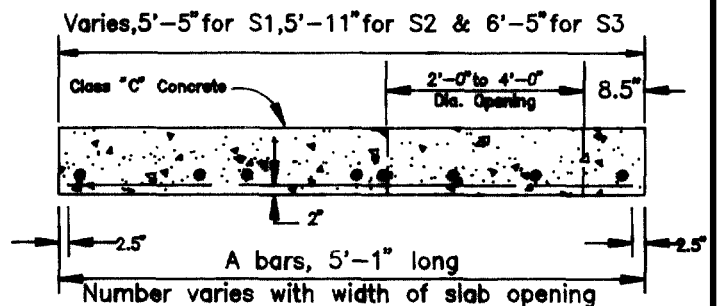

SECTION J-J

This drawing previously AA-S7

W. J. Neal
 STORMWATER PROGRAM MANAGER

James Francis
 ADMINISTRATOR

12/15/93
 APPROVED

REVISED

CONCRETE SLAB
 FOR
 TYPE "B" MANHOLE

CITY OF COLUMBUS
 DEPARTMENT OF PUBLIC UTILITIES
 DIVISION OF SEWERAGE & DRAINAGE

STANDARD
 CONSTRUCTION DRAWING

DR. J.M.R. SHEET 1
 CK. OF 1

FILE NO.
 AA-S109